

LED




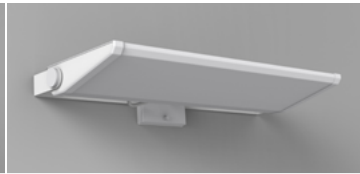
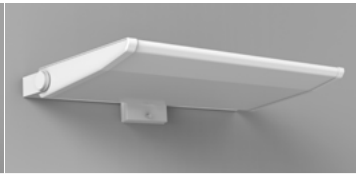

ASYMMETRIC LIGHTING



windirect[™]
LED ASYMMETRIC LIGHTING

Forget about compromising design versatility because of energy concerns.

Windirect[™] LED is the smart alternative to traditional source asymmetric lighting, rivaling illumination levels from T5 fluorescent to high-output 350 watt metal halide lamps. An optical design specifically optimized for the LED source delivers superior performance in beam control, distribution shape, forward throw, and efficacy. Highly configurable, four housing profile options translate to design versatility.

							
801 Series 801 & 801L		802 Series 802 & 802L		803 Series		804 Series	
801 options in 2 lengths equivalent to 39w and 70w metal halide 801L options in 4 lengths equivalent to T8 and T5HO fluorescent		802 options in 2 lengths equivalent to 70w and 150w metal halide 802L options in 3 lengths equivalent to 2-lamp T5HO fluorescent		803 options in 2 lengths equivalent to 100w and 175w metal halide		804 options in 3 lengths equivalent to 150w, 315w, and 350w metal halide	
Lengths							
12", 24", 36", 48", 96"		12", 24", 36", 48"		15", 24"		12", 24", 36"	
Output							
801 Flood: 12" up to 2236 lm 24" up to 4472 lm	801L Linear: 559 lm/ft 801L Linear HO: 1118 lm/ft	802 Flood: 12" up to 3278 lm 24" up to 6556 lm	802L Linear: 3278 lm/ft	12" up to 4988 lm 24" up to 9976 lm	12" up to 6571 lm 24" up to 13142 lm 36" up to 19713 lm		
Energy							
801 Flood: 12" 20 w/ft 24" 40 w/ft	801L Linear: 5.0 w/ft 801L Linear HO: 9.8 w/ft	802 Flood: 12" 30 w 24" 60 w	802L Linear: 30 w/ft	15" 46 w 24" 93 w	12" 61 w 24" 121 w 36" 182 w		
Efficacy							
801 Flood: Up to 112 lm/w	801L Linear: Up to 112 lm/w	802 Flood: Up to 108 lm/w	802L Linear: Up to 108 lm/w	Up to 107 lm/w	Up to 108 lm/w		
Distribution							
Asymmetric		Asymmetric		Asymmetric		Asymmetric	
CCT							
83		83		83		83	
Dimming							
0-10V		0-10V		0-10V		0-10V	
Mounting Options							
Wall, Ceiling, Cantilever Pendant, Base Mount		Wall, Ceiling, Cantilever Pendant, Base Mount		Wall, Ceiling, Cantilever Pendant, Base Mount		Wall, Pendant	
Finishes							
Semi-Gloss White, Semi-Gloss Black, Aluminum Paint		Semi-Gloss White, Semi-Gloss Black, Aluminum Paint		Semi-Gloss White, Semi-Gloss Black, Aluminum Paint		Semi-Gloss White, Semi-Gloss Black, Aluminum Paint	
L80 Rating							
L80 >60,000 hours		L80 >60,000 hours		L80 >60,000 hours		L80 >60,000 hours	
Environments							
Interior/Exterior/Natorium		Interior/Exterior/Natorium		Interior/Exterior/Natorium		Interior/Exterior/Natorium	